




SOLAR solutions

A ray of sunshine ...
A transmitter ...

Now with technology **SOLAR SOLUTIONS** from enjoy-motors®
this is all you need to power your blind or shutters

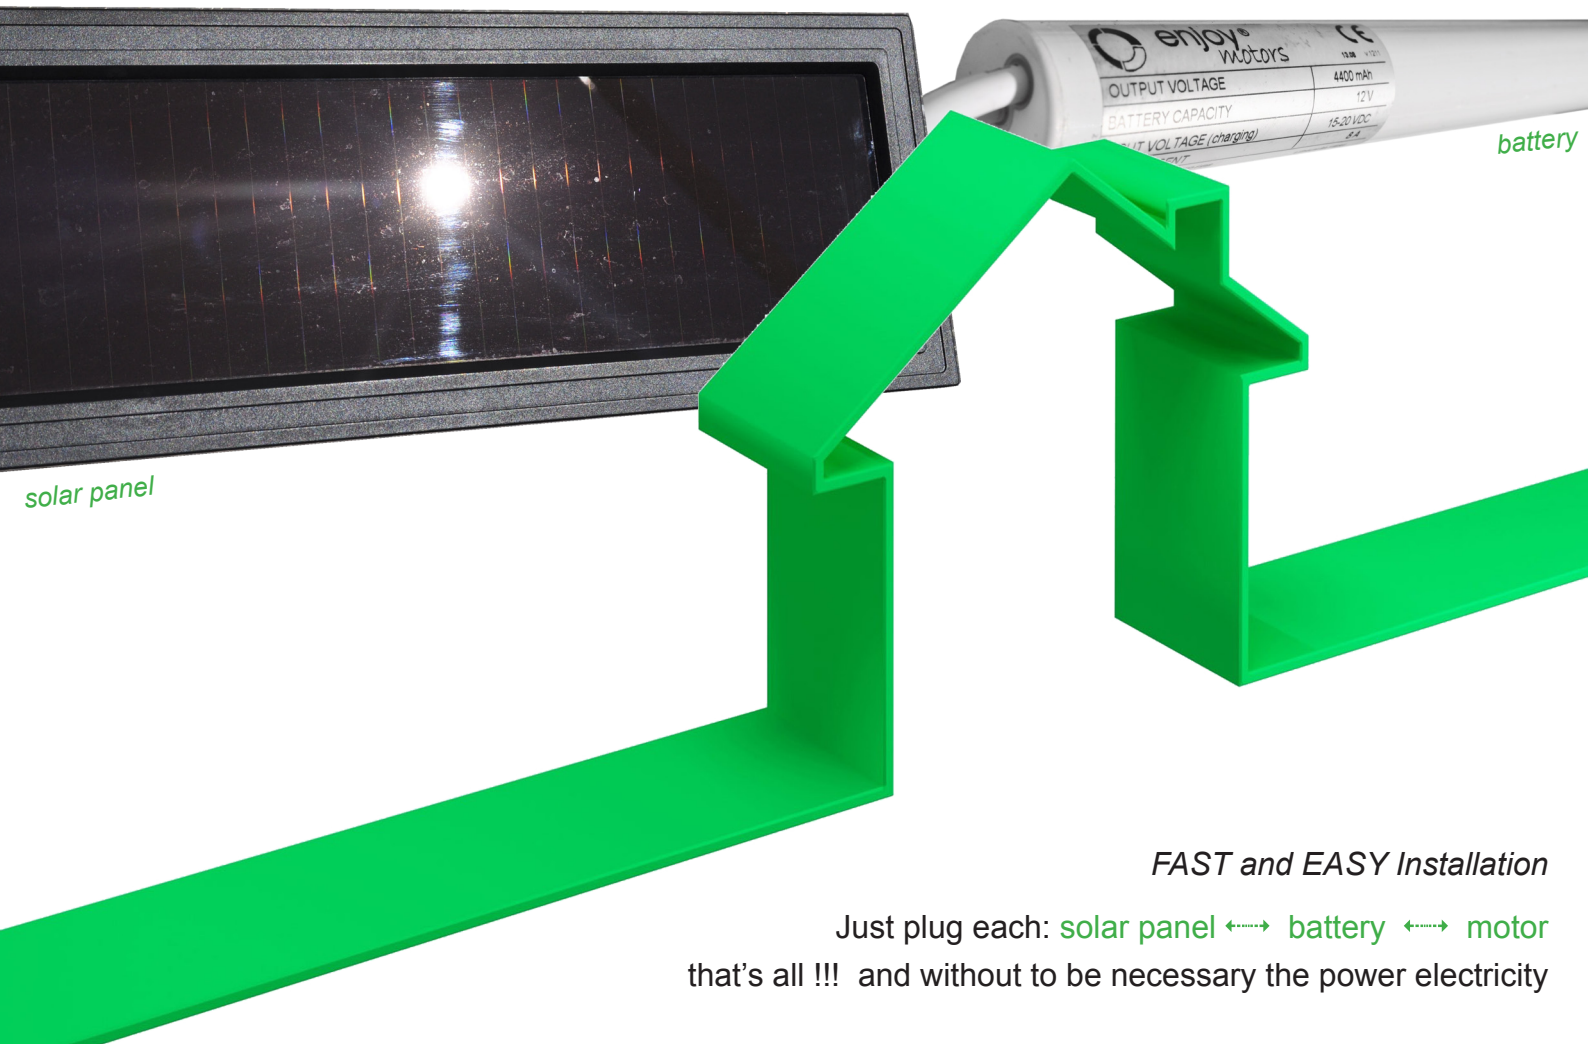

solar panel

battery

FAST and EASY Installation


Just plug each: solar panel ↔ battery ↔ motor
that's all !!! and without to be necessary the power electricity







solar panel

Output Voltage	21.6V
Output Consumption	1.2W
Protection Index	IP55
Working Temperature	-20° ~ +60°
Lifetime	12years

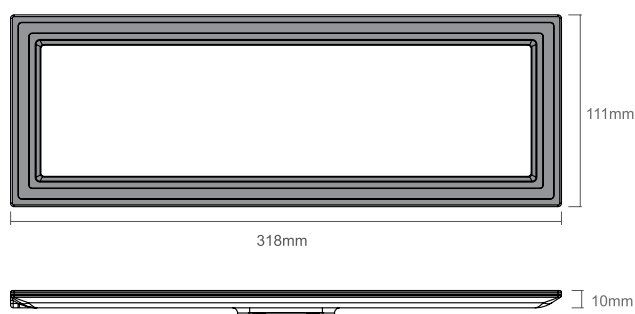

wall holder to be fix the solar panel into the facade, with preset angle of 30 °

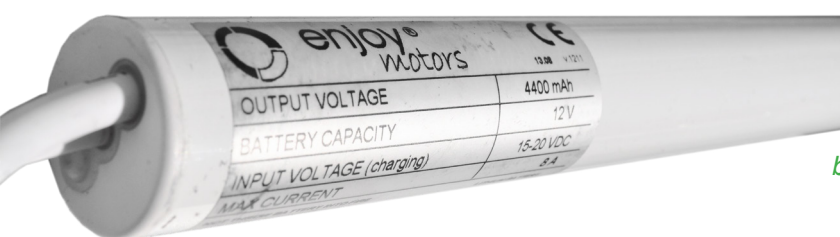

battery

	B1	B2	B3
Output Voltage	12 V		
Nominal capacity	2200 mAh	4400 mAh	4400 mAh
Discharge protection voltage	8,5 A		
Maximun current	4,5 A		
Suitable for	JED25	JED40	JED50
Lenght (mm)	320	510	630
Diameter (mm)	28	28	28
Weight	110 g	210 g	240 g
Working temperature	-10° ~ +60°		

solar panel ↔ battery



battery ↔ motor



SOLAR solutions



DC 12V: electronic motors · build in receiver · frequency eRS4 (433.92 MHz)



transformer from 230 V → 12 V

if necessary, the battery can be recharged quickly, connecting it to the electricity through a transformer from 230 V to 12 V

tubular motors to be used with ROLLIN BLINDS

	JE25/07R412V	JE50/5R412V
Torque (Nm)	0,7	5
Motor diameter (mm)	Ø 25	Ø 45
RPM	31	30
Limit switch capacity	∞	∞

Voltage (V)	12 V	12 V
Absorption (A)	0,74	
Consumption (W)	9	

Motor length (mm)	265	565
-------------------	-----	-----

tubular motors to be used with ROLLER SHUTTERS

	JE50/15R412V
Torque (Nm)	15
Motor diameter (mm)	Ø 45
RPM	11
Limit switch capacity	∞

Voltage (V)	12 V
Absorption (A)	
Consumption (W)	

Motor length (mm)	565
-------------------	-----






S O L A R solutions

enjoy-motors ®

46370 Chiva · Valencia · Spain
tel. +34 962 521 490 · fax +34 962 521 417
info@enjoy-motors.com · www.enjoy-motors.com

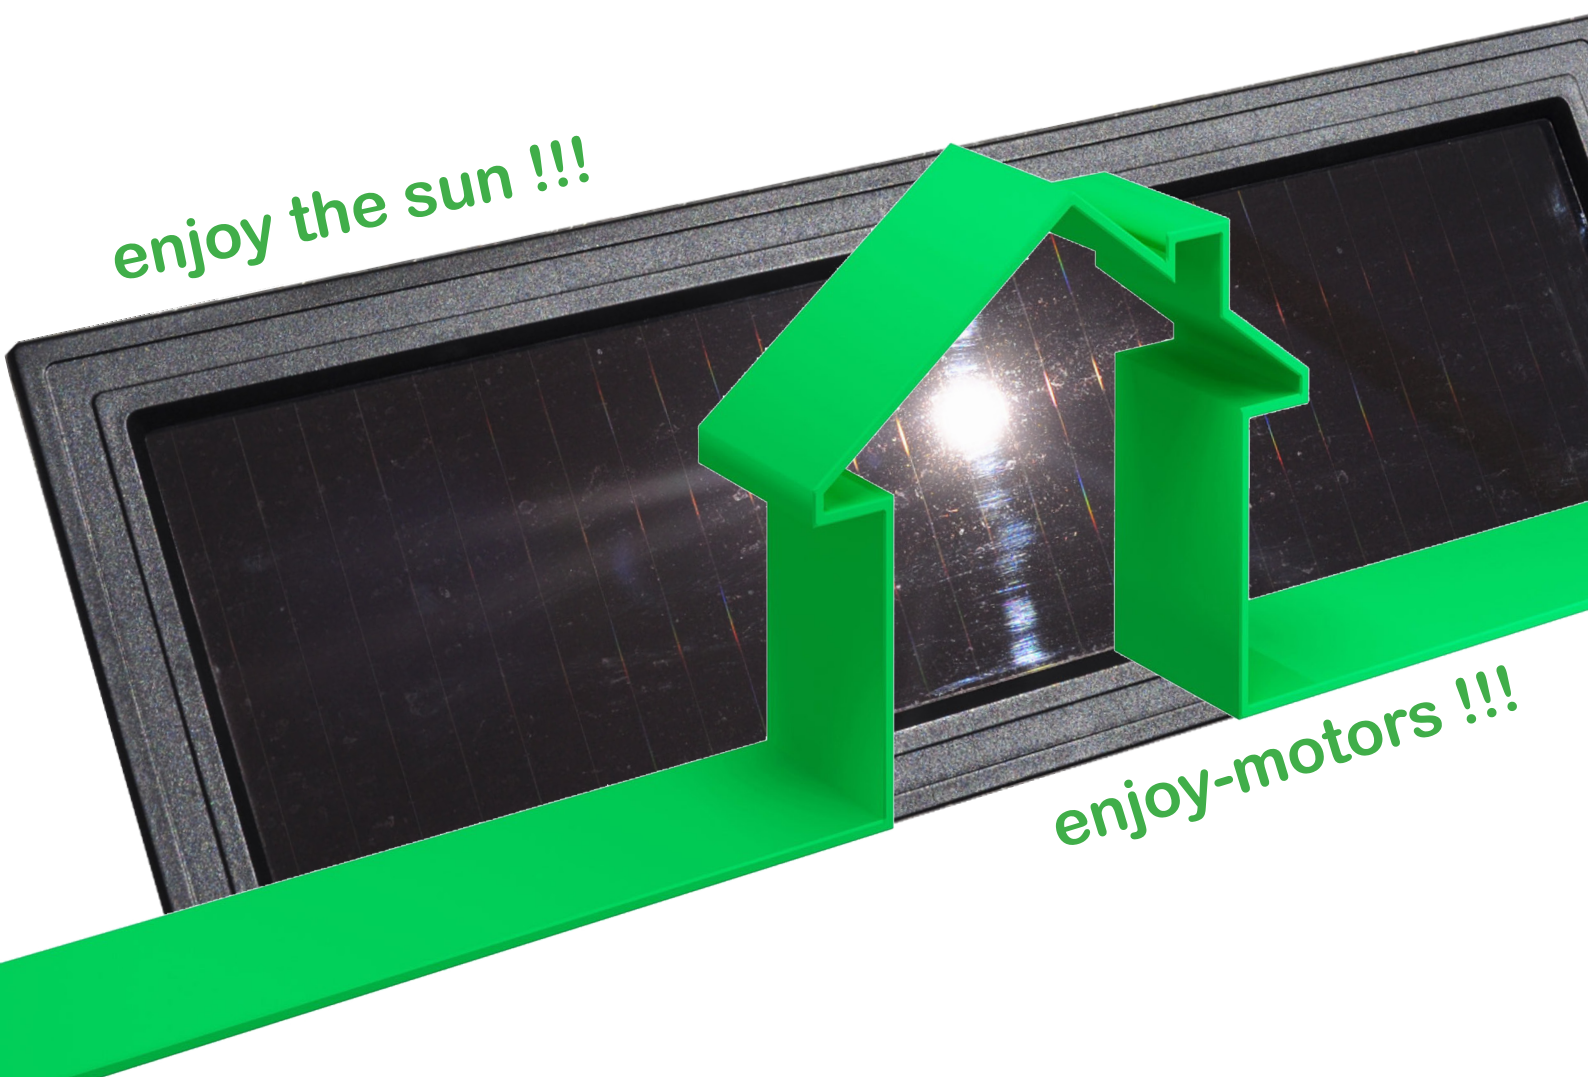

enjoy the sun !!!

enjoy-motors !!!

